

DEF hose assemblies without static wire.

- Designed for durability and flexibility.
- Abrasion resistant.
- Supplied without static wire.
- Recommended for use with electric pumps or dispensers.
- Designed for any DEF dispensing applications.
- Engineered for dispensing DEF where UL approval is not required.
- Curb pump hose recommended for:
 - UL Listed hose material requirements.
 - For high aromatics or severe applications.
- All DEF hose assemblies are 100% inspected for pressure to 50 psi.

(See page two for coupling descriptions)



GP/GPM
TYPE

AN TYPE

ANB/ANF
TYPE

ANF/ANMF
TYPE

DEF Fueling Hoses

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
3/4" HOSES		
CP12DF10GP	3/4" x 10' DEF Assembly Hose	2.9 (1.3)
CP12DF12GP	3/4" x 12' DEF Assembly Hose	3.5 (1.6)
CP12DF12GPX	3/4" x 12' DEF Assembly Hose Bulk	3.5 (1.6)
CP12DF14GP	3/4" x 14' DEF Assembly Hose	4.1 (1.9)
CP12DF15GPX	3/4" x 15' DEF Assembly Hose Bulk	4.4 (2.0)
CP12DF17GP	3/4" x 17' DEF Assembly Hose	4.9 (2.2)
CP12DF20GP	3/4" x 20' DEF Assembly Hose	5.8 (2.6)
CP12DF20GPX	3/4" x 20' DEF Assembly Hose Bulk	5.8 (2.6)
CP12DF10AN	3/4" x 10' DEF Assembly Hose w/ 3/4" NPT aluminum fittings	2.9 (1.3)
CP12DF10ANB	3/4" x 10' DEF Assembly Hose with 3/4" BSPP Aluminum Fittings	2.9 (1.3)
CP12DF10ANF	3/4" x 10' DEF Assembly Hose with 1" Female BSPP Fittings	2.9 (1.3)

Construction

Tube	Black customized peroxide-cured EPDM
Cover	Black customized EPDM with smooth finish
Reinforcement	Multiple textile plies
Temperature Range	-40°F to +212°F (-40°C to +100°C)



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DEF hose assemblies without static wire.

System Options

Available in these Sizes

ID	NOM OD		MAX WP		WEIGHT		
Size	MM	IN	MM	LB/FT	KG/M	LB/FT	KG/M
3/4"	19	1.13	29	150	1.03	0.29	0.43

Couplings


Permanent externally crimped 3/4" NPT polypropylene stem with brass ferrule (GP type) or 3/4" BSPP (GPM type)

Permanent externally crimped 3/4" NPT anodized aluminum stem with stainless steel ferrule (AN type)

Permanent externally crimped 3/4" BSPP anodized aluminum stem with stainless steel ferrule (ANB type)

Permanent externally crimped 1" female BSPP anodized aluminum stem with stainless steel ferrule (ANF type)

Permanent externally crimped 1" female & 3/4" male BSPP anodized aluminum stems with stainless steel ferrules (ANB type)

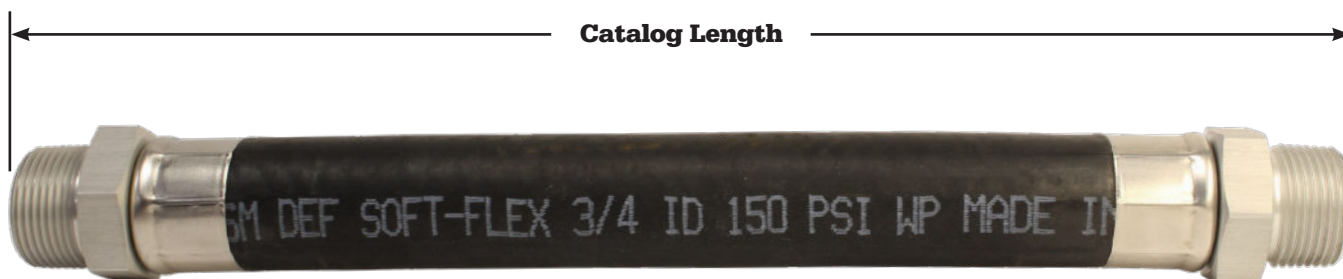

2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A. 