

Automatic shut-off nozzle for full-service and self-service stations.

- X nozzle shuts off when the gas tank is full.
- Comes standard with smooth full grip guard.
- Aluminum reinforced spout bushing keeps spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- Optional EZ lever:
 - two piece design cuts opening force in half
 - easier "to-the-penny" dispensing
 - ADA Compliant
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- StreamShaper® reduces turbulence for straighter fuel flow and less splash back spillage.



New Unleaded Nozzles


MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
159404N^	with Three Notch Hold Open Clip	3.0 (1.4)
E159404N^	with Three Notch Hold Open Clip	3.1 (1.4)
159408	without Hold Open Clip	3.0 (1.4)
E159408	without Hold Open Clip	3.0 (1.4)
159424N^	with Three Notch Hold Open Clip and Sightglass	2.9 (1.3)
159454N^	with Three Notch Hold Open Clip and Flo-Equalizer®	3.0 (1.4)
159458	without Hold Open Clip, with Flo-Equalizer®	3.0 (1.4)
159464N^	with Three Notch Hold Open Clip and Waffle Splash Guard	2.7 (1.2)
159468	without Hold Open Clip, with Waffle Splash Guard	2.7 (1.2)
1120404N^	with Two Notch Hold Open Clip and EZ Lever	3.0 (1.4)

New Light Duty Diesel Nozzles

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
159403N^	with Three Notch Hold Open Clip	3.1 (1.4)
E159403N^	with Three Notch Hold Open Clip	3.1 (1.4)
159407	without Hold Open Clip	3.0 (1.4)
E159407	without Hold Open Clip	3.0 (1.4)
159453N^	with Three Notch Hold Open Clip and Flo-Equalizer®	3.1 (1.4)
159457	without Hold Open Clip, with Flo-Equalizer®	3.1 (1.4)
159463N^	with Three Notch Hold Open Clip and Waffle Splash Guard	2.8 (1.3)
159467	without Hold Open Clip, with Waffle Splash Guard	2.8 (1.3)
159496N^	with Three Notch Hold Open Clip, POPD® S and Waffle Splash Guard	2.8 (1.3)
1594122N^	with Three Notch Hold Open Clip, POPD® H, and StreamShaper®	2.8 (1.3)
1594134	without Hold Open Clip, with StreamShaper®	2.8 (1.3)
1594135N^	with Three Notch Hold Open Clip and StreamShaper®	2.8 (1.3)
1594137N^	with Three Notch Hold Open Clip, Waffle Splash Guard and StreamShaper®	2.8 (1.3)
1120403N^	with Two Notch Hold Open Clip and EZ Lever	3.0 (1.4)

Construction

Body	One piece die cast aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	One piece contoured steel with hard plastic cover
Inlet	¾" / 19 mm NPT

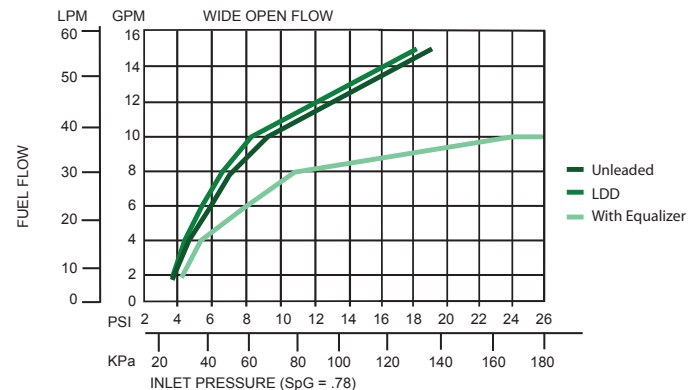

^ NOT LISTED