

# M Model 200 Series Farm/Utility Nozzle

SPECIFICATION SHEET


Lightweight manually-operated shut-off nozzle used for gravity and low pressure fueling.

## Features

- Dual outlet threads. Nozzle body accepts either leaded or unleaded spouts
- Replaceable spouts
- Maximum working pressure 25 PSI
- Nozzle trigger pinned in place
- **200S** is compatible with E-85
- Female NPT threads on inlet

## Construction Details

- Aluminum body
- Buna-N (Viton® in 200S) disc
- Brass (stainless steel in 200S) stem
- Buna-N o-ring (Viton® in 200S) stem seal
- Aluminum (15/16" OD) spout leaded
- Aluminum (13/16" OD) spout unleaded

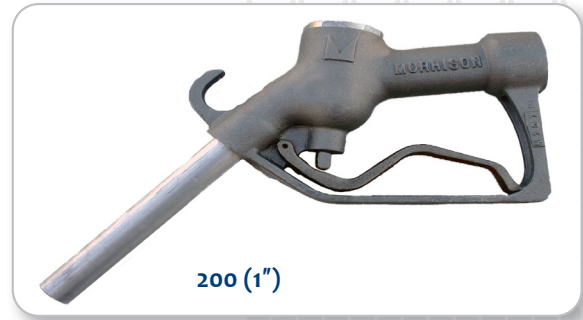

I.D Number	Size	Spout Size	Weight (lbs)
200---0600 AN	¾"	13/16"	1.75
200---0700 AN	1"	13/16"	1.75
200---0800 AN	¾"	15/16"	1.75
200---0900 AN	1"	15/16"	1.75
<hr/>			
200S--0600 AN	¾"	13/16"	1.75
200S--0700 AN	1"	13/16"	1.75
200S--0800 AN	¾"	15/16"	1.75
200S--0900 AN	1"	15/16"	1.75
<hr/>			
200TMC0600 2N	¾"	N/A	1.50
200TMC0700 2N	1"	N/A	1.50