

VAPOR RECOVERY BREAK AWAY VALVES & HOSE ACCESSORIES

HEALY™ vapor recovery break away valves provide full product and vapor shut-off in the event of a drive-off with 350 lbs of separation force. Reduce damage to the dispenser, vehicle, and forecourt with the immediate sealing of both fuel and vapor pathways. Both in-line and swivel break away valve options are certified to be reconnected in the field to help mitigate the cost of separations.



HIGHLIGHTS


- Provides full-rated product flow of up to 10 GPM.
- Easy on-site reassembly.
- Includes spare shear screw conveniently mounted on the break away valve.
- Reduces fuel spillage and vapor emissions.
- Optional two-piece scuffguard available for in-line option.
- Swivel option includes scuffguard.
- UL listed and CARB VR-201/202 approved.

SPECIFICATIONS

In-Line Break Away Valve Components & Thread Types

For fitting threads F = fixed, S = swivel.


- 1 Whip hose
- 2 In-line break away valve
- 3 Curb hose
- 4 All HEALY™ nozzles

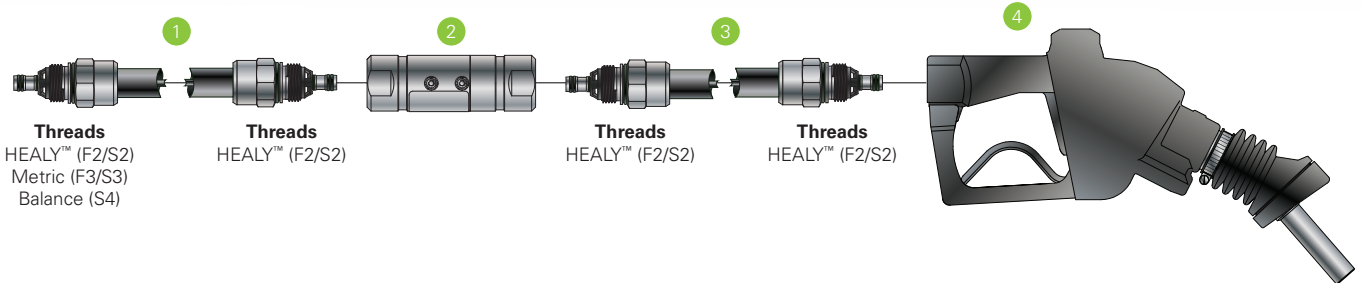

Swivel Break Away Valve Components & Thread Types

For fitting threads F = fixed, S = swivel.

- 1 Curb hose
- 2 Swivel break away valve
- 3 All HEALY™ nozzles

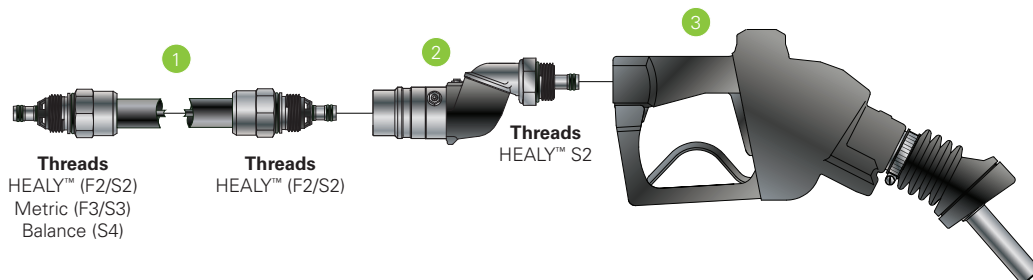

ORDERING INFORMATION

In-Line Break Away Valves



Model	Description
8701W	In-line break away valve with vapor path shut-off, 350 lbs strength, installed between whip hose and hose, includes one spare shear screw
762	In-line break away scuffguard top (dispenser end)
761	In-line break away scuffguard bottom (nozzle end)
715VV	Repair kit for in-line break away, includes valves and O-rings
787	Replacement shear screw for in-line break away valve, nickle-plated brass
Z055	O-ring kit for in-line break away with nickel-plated shear screw

In-Line Break Away Valves



Model	Description
807	Swivel break away valve with vapor path shut-off, 350 lbs strength, installed between hose and nozzle, includes scuffguard
405417001	Replacement swivel break away scuffguard
787-1	Replacement shear screw for 807 swivel break away valve, nickle-plated

Break Away Valve Reconnection Tool



Model	Description
795	Clamp repair tool for in-line and swivel break away valves

Flow Limiter



Model	Description
1301	Hose flow limiter for 8701W standard breakaway, installed between breakaway and main hose (CARB and UL Listed)

Hose Adapters



Model	Description
CX6-A	Hose Adapter, non-vapor ready, NPT
CX6-AE	Hose adapter, non-vapor ready, BSP, international only